



# Unit 00AL Jib Reefing & Furling

Unit 00AL is the perfect jib reefing and furling system for small cruising boats under 26 ft (8 m). It combines most of the features of larger Harken® furling systems in a simpler unit. Like other Harken® systems, the main components of the 00AL are 6061-T6 Hardkote-anodized aluminum with Teflon® impregnation.

Features include a free-spinning, omnidirectional bearing system with multiple ball bearing races, a double grooved foil for racing sail changes, and a light-weight halyard swivel to minimize windage and weight aloft. The furler's large inside spool provides plenty of mechanical advantage for smooth, easy reefing and furling.

There are enough aluminum foil sections to build a headstay with a pin-to-pin measurement to 31 ft 6 in (9.60 m). Harken® offers an additional foil and connector to extend headstay length to 35 ft (10.7 m).

Note: You must cut your headstay to install 00AL furling. You must also purchase a Harken® clevis pin to match your chainplate.



*Bearing shields protect Air Swivel® and tack bearings from UV and dirt*


*Small Air Swivels® turn freely on computer-designed bearing races to reduce windage and weight aloft*

*Large-diameter ball bearings minimize friction, require no lubrication or isolating seals*

*Pressure-cast sculpted aluminum line guard is open for easy line access*

*Large inner spool diameter increases mechanical advantage for more powerful reefing and furling*

## Optional Parts

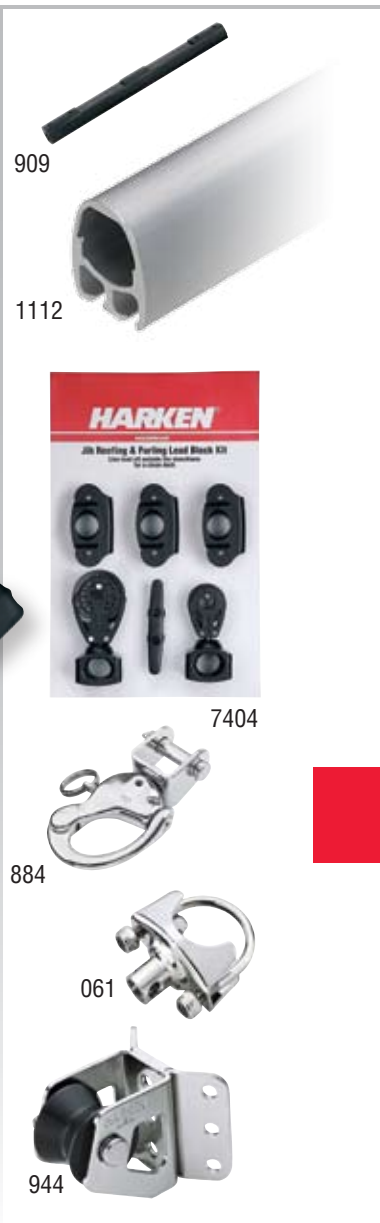

909

1112



7404

884

061

944

## Unit 00AL

Typical Boat Length 20' - 26' (6 - 8 m)

Wire Ø (1 x 19 SS)	Rod Ø	Clevis Pin Ø
1/8", 5/32", 3/16" (3, 4, 5 mm)	-4, 4.37 mm	1/4", 5/16", 3/8", 7/16" (6, 8, 9.5, 11 mm)
<b>Headstay Length</b>	Standard 9.60 m (31'6"); max 10.67 m (35')	
<b>Part No.</b>	<b>Description</b>	
1110	Furling system	
<b>Clevis Pin Assembly Required - sold separately</b>		
1106	1/4" (6 mm)	
1107	5/16" (8 mm)	
1108	3/8" (9.5 mm)	
1109	7/16" (11 mm)	

### Optional Parts

909	Extra 6" (152 mm) connector
1112	Extra 3.5' (1.07 m) foil extrusion
7404	Lead block kit: 3 x 7403/1 x 7402/1 x 7401/1 cleat
884	Snap shackle for tack/head (each shackle)
061	Stanchion mount base
944	Halyard restrainer (use only when required)

Consult with Harken® if boat length exceeds specifications above