

# Dinghy

Low-profile Dinghy blocks are compact and lightweight, with fast trim and release under high or low loads. Blocks are designed for dinghies and control lines on larger boats. Do not use light-duty Dinghy blocks on heavy course racing keelboats, scows, or catamarans.

Free-rolling Delrin® ball bearings, sheave and sideplates UV-stabilized with carbon-black additive for maximum protection. High-strength stainless steel straps reinforce blocks.

**Use for:**

Sheets                      Control lines  
Traveler controls      Cunninghams




*In-head shackle minimizes block length for purchase power in a limited space*

*Free-rolling large-diameter Delrin® sheaves*

025

Actual Size

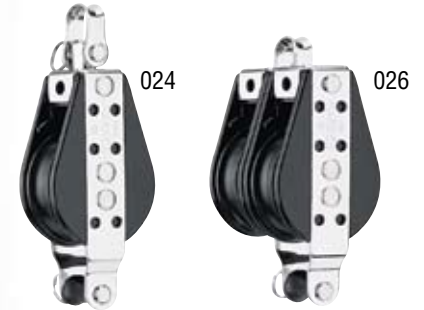

027



046



063

**Cutout**  
1 1/16" (27 mm) x 2 1/16" (68 mm)

Tirion 6.25, Jac de Ridder, Geuzen Boats — Photo courtesy Geuzen Boats

Part No.	Description	Sheave Ø		Length		Weight		Max line Ø		Shackle pin Ø		Safe working load		Breaking strength	
		in	mm	in	mm	oz	g	in	mm	in	mm	lb	kg	lb	kg
021	Single	1 3/4	44	3	76	3	85	3/8	10	3/16	5	350	159	2000	907
022	Single/becket	1 3/4	44	4	102	3 1/2	99	3/8	10	3/16	5	350	159	2000	907
023	Single/swivel	1 3/4	44	3 1/2	89	3 1/2	99	3/8	10	3/16	5	350	159	2000	907
024	Single/swivel/becket	1 3/4	44	4 1/2	114	4	113	3/8	10	3/16	5	350	159	2000	907
025	Double	1 3/4	44	3	76	5 1/2	156	3/8	10	3/16	5	700	318	2000	907
026	Double/becket	1 3/4	44	4	102	6	170	3/8	10	3/16	5	700	318	2000	907
027	Cheek†*	1 3/4	44	2 3/4	70	2 1/2	71	3/8	10	—	—	350	159	2000	907
046	Thru-deck*	1 3/4	44	3	76	4	113	3/8	10	—	—	350	159	2000	907
063	Traveler control**	1 3/4	44	3 1/4	83	5 1/2	156	3/8	10	3/16	5	700	318	2000	907

†Includes fasteners    \*#8 (4 mm) RH fasteners    \*\*Fits Big Boat 3163 traveler car w/659